

# Compal Confidential

## NAV50/60 Schematics Document

### Intel Pineview Processor with Tigerpoint + DDRII

2010-05-11

REV: 3.0

Security Classification	Compal Secret Data			Compal Electronics, Inc.	
Issued Date	2006/08/18	Deciphered Date	2007/8/18	Title	SCHEMATICS , MB A5651
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number	Rev
				401793	D
				Date: Friday, May 21, 2010	Sheet 1 of 32

# Compal Confidential

Model Name : NAV50/60

File Name : LA-5651P

Clock Generator  
CK505  
page 8



Thermal Sensor  
EMC1402  
page 5

CRT Conn  
page 10

LCD Conn.  
page 9

Pineview  
FCBGA 559  
22x22mm  
page 4,5,6

Memory BUS(DDRII)

DDRII-SO-DIMM  
page 7

1.8V DDRII 667

DMI  
X2 mode  
GEN1

Tigerpoint  
PCBGA360  
17x17mm  
page 11,12,13,14

PCI-Express

USB

HDA

USB Port X2  
page 20

BlueTooth  
page 15

CMOS CAM  
page 9

3G  
page 15

MINI Card x1  
3G  
page 15

To I/O Board  
WLAN  
page 20

To I/O Board  
10/100 Ethernet  
AR8132L  
page 20

Transfermer

RJ45

SATA

HDD  
page 16

LPC BUS

ENE KBC  
KB926  
page 17

SPI

Int.KBD  
page 19

Touch Pad  
page 19

SPI ROM  
page 17

Conn. to I/O Board  
Aralia Codec  
ALC272  
page 20

USB Port x1  
To I/O Board Conn.  
page 20

To I/O board  
Card Reader  
ENE6252  
page 20

AMP & INT  
Speaker

INT MIC

HeadPhone &  
MIC Jack

SD/MMC/MS  
CONN

Power ON/OFF  
page 18

DC/DC Interface  
page 25

DC IN  
page 23

3VALW/5VALW  
page 26

BATT IN  
page 24

0.89VP/1.5VP  
0.9VSP/2.5VSP  
page 28

CHARGER  
page 25

1.8V/VCCP  
page 27

CPU\_CORE  
page 29

Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2006/08/18	Deciphered Date	2007/8/18	Title	SCHEMATICS , MB A5651
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number	401793
				Date	Friday, May 21, 2010
				Sheet	2 of 32
				Rev	D

Voltage Rails

Power Plane	Description	S1	S3	S5
VIN	Adapter power supply (19V)	N/A	N/A	N/A
B+	AC or battery power rail for power circuit.	N/A	N/A	N/A
+CPU_CORE	Core voltage for CPU	ON	OFF	OFF
+0.9VS	0.9V switched power rail for DDR terminator	ON	OFF	OFF
+VCCP	VCCP switched power rail	ON	OFF	OFF
+1.5VS	1.5V switched power rail	ON	OFF	OFF
+1.8V	1.8V power rail for DDR	ON	ON	OFF
+0.89V	Graphic core power rail	ON	OFF	OFF
+3VALW	3.3V always on power rail	ON	ON	ON*
+3VS	3.3V switched power rail	ON	OFF	OFF
+5VALW	5V always on power rail	ON	ON	ON*
+5VS	5V switched power rail	ON	OFF	OFF
+VSB	VSB always on power rail	ON	ON	ON*
+RTCVCC	RTC power	ON	ON	ON

Note : ON\* means that this power plane is ON only with AC power available, otherwise it is OFF.

STATE \ SIGNAL	SLP_S3#	SLP_S4#	SLP_S5#	+VALW	+V	+VS	Clock
Full ON	HIGH	HIGH	HIGH	ON	ON	ON	ON
S1(Power On Suspend)	HIGH	HIGH	HIGH	ON	ON	ON	LOW
S3 (Suspend to RAM)	LOW	HIGH	HIGH	ON	ON	OFF	OFF
S4 (Suspend to Disk)	LOW	LOW	HIGH	ON	OFF	OFF	OFF
S5 (Soft OFF)	LOW	LOW	LOW	ON	OFF	OFF	OFF

BOARD ID Table(Page 17)

	VCC	3.3V				
	Ra	100K				
	ID	BRD ID	Rb	Vab-Min	Vab-Typ	Vab-Max
NAV50	0	R01 (EVT)	0	0V	0V	0V
	1	R02 (DVT)	8.2K	0.216V	0.250V	0.289V
	2	R03 (PVT)	18K	0.436V	0.503V	0.538V
	3	R10A (MP)	33K	0.712V	0.819V	0.875V
NAV60	4	R01 (EVT)	56K	1.036V	1.185V	1.264V
	5	R02 (DVT)	100K	1.453V	1.650V	1.759V
	6	R03 (PVT)	200K	1.935V	2.200V	2.341V
	7	R10A (MP)	NC	2.500V	3.3V	3.3V

External PCI Devices

DEVICE	IDSEL #	REQ/GNT #	PIRQ
--------	---------	-----------	------

No PCI Device

EC SM Bus1 address

EC SM Bus2 address


Device	Address	Device	Address
Smart Battery	0001 011X b	EMC1402	100_1100

ICH7M SM Bus address


Device	Address
Clock Generator (SLG8SP556VTR)	1101 001Xb
DDR DIMMA	1010 000Xb

Security Classification	Compal Secret Data			Compal Electronics, Inc.		
Issued Date	2006/08/18	Deciphered Date	2007/8/18	Title	SCHEMATICS , MB A5651	
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Rev	Document Number	Rev
				18	401793	D
				Date:	Friday, May 21, 2010	Sheet 3 of 32







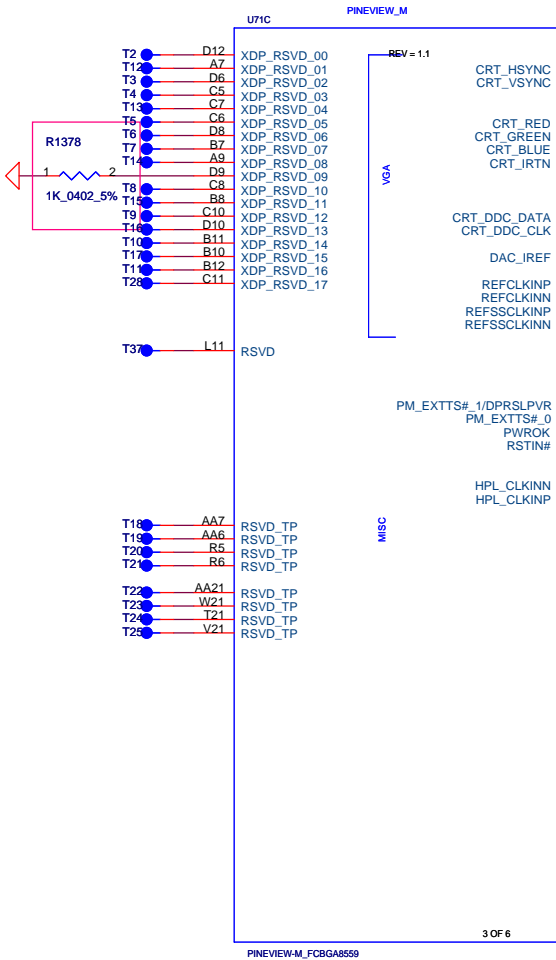


Place closed to chipset



H\_THERMDA, H\_THERMDC routing together.  
Trace width / Spacing = 10 / 10 mil

## CPU THERMAL SENSOR

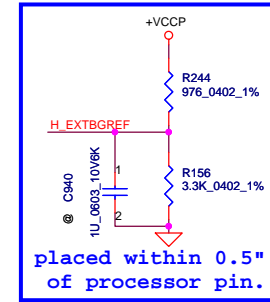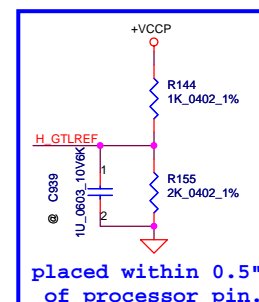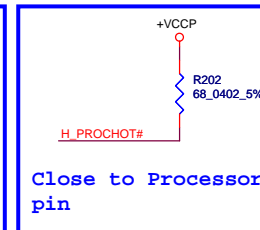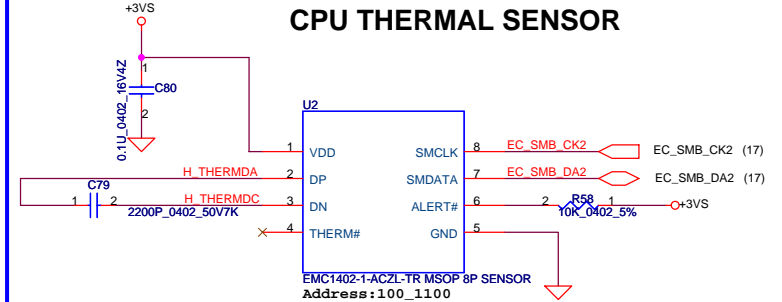

Security Classification		Compal Secret Data				Compal Electronics, Inc.									
Issued Date		2006/08/18		Deciphered Date		2007/8/18		Title		SCHEMATICS , MB A5651					
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.										Rev		D			
										Size B		Document Number		401793	
										Date:		Friday, May 21, 2010		Sheet 5 of 32	

[illegible][illegible]

VCCACK_DDR		VCC
VCCA_DDR	POWER	
VCCA_DDR		
VCCA_DDR		
VCCA_DDR		
VCCA_DDR		
VCCA_DDR		
VCCA_DDR		
VCCA_DDR		
VCCA_DDR		
VCCA_DDR		
VCCACK_DDR		VCCSENSE
VCCACK_DDR		VSSSENSE
		VCCA
		VCCP
		VCCP

Pin 10 connections for the VCCD module:

- VCCD\_AB\_DPL → VCCP
- VCCD\_HMPLL → VCCP
- VCCSFR\_AB\_DPL → VCCALVDS, VCCDLVDS
- VCCACRTDAC → LVDS
- VCC\_GIO, VCCRRG\_EAST, VCCRRG\_WEST, VCCRRG\_WEST → VCCA\_DMI, VCCB\_DMI

VCCRING\_WEST  
VCC\_LGI  
R32  
R31  
VCCPSFR\_DMIHMLPL  
VCCP  
5.0V  
PINEVIEW-M\_FCBGA8559

VCC7  
100\_0402 6.3V8K  
GND

VCCSENSE 1 100\_0402 1% 2  
VSSSENSE 1 100\_0402 1% 2

er Com

PLACE IN CAVITY

VCC  
VCC  
D24  
D26  
VCC  
D28  
E22  
E24  
VCC  
E27  
VCC  
F21  
VCC  
F22  
F25  
VCC  
G19  
VCC  
G21  
VCC  
G24  
H17  
VCC  
H19  
VCC  
H22  
VCC  
H24  
J17  
VCC  
J19  
VCC  
J21  
VCC  
J22  
VCC  
K15  
VCC  
K17  
VCC  
K21  
VCC  
L14  
VCC  
L16  
VCC  
L19  
VCC  
L21  
VCC  
N14  
VCC  
N16  
VCC  
N19  
VCC  
N21

+VCCP

C1160  
0.1U\_0402\_10V6K

C1161  
0.1U\_0402\_10V6K

Close U71.D4

R20  
0\_0603\_5%

+RING EAST

C242  
1U\_0603\_10V6K

R21

The schematic diagram illustrates the measurement setup for the processor core analog supply current. It features a voltage divider network connected to the VCCSENSE and VSSSENSE pins. The network includes a resistor R28 (0.0603\_5%) and capacitors C64, C241, C68, C237, and C391 (0.01U\_0402\_16V7K). The power supply rails shown are +VCCP, +RING, and +VCC DMI. A note indicates a core analog supply current of 0.08A.


ck list change to 22uF 06/06

Title  
**Compal Electronics, Inc.**  
**SCHEMATICS , MB A5651**  
 Document Number  
**401793**  
 Date: Friday, May 21, 2010 1:58 PM Sheet 6 of 35



**WWW.AliSaler.Com**

- (4) DDR\_A\_DQS#[0..7]
- (4) DDR\_A\_D[0..63]
- (4) DDR\_A\_DM[0..7]
- (4) DDR\_A\_DQS[0..7]
- (4) DDR\_A\_MA[0..14]

Layout Note:  
Place near JDIM1

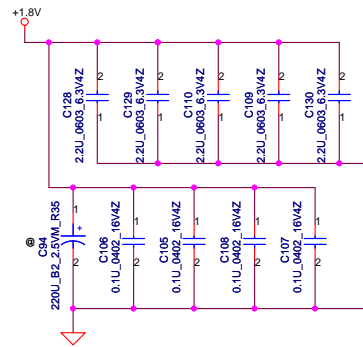


Layout Note:  
Place one cap close to every 2 pullup resistors terminated to +0.9VS

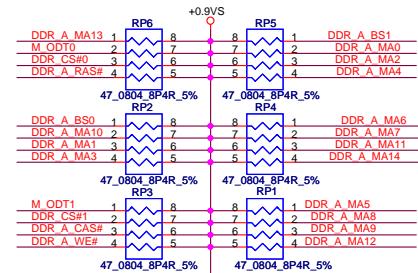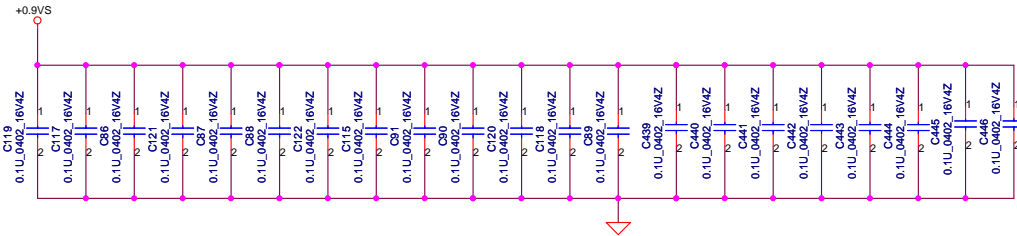

Layout Note:  
Place these resistor closely DIMMA, all trace length < 750 mil

Layout Note:  
Place this resistor closely DIMMA, all trace length Max=1.3"

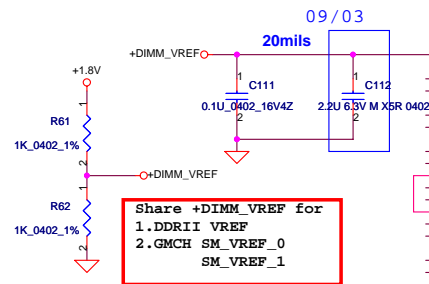

Share +DIMM\_VREF for  
1.DDRII VREF  
2.GMCH SM\_VREF\_0  
SM\_VREF\_1


- (4) DDR\_CKE0
- (4) DDR\_A\_BS2
- (4) DDR\_A\_BS0
- (4) DDR\_A\_WE#
- (4) DDR\_A\_CAS#
- (4) DDR\_CS#1
- (4) M\_ODT1

- DDR\_A D0
- DDR\_A D1
- DDR\_A DQS#0
- DDR\_A DQS0
- DDR\_A D2
- DDR\_A D3
- DDR\_A D8
- DDR\_A D9
- DDR\_A DQS#1
- DDR\_A DQS1
- DDR\_A D10
- DDR\_A D11
- DDR\_A D16
- DDR\_A D17
- DDR\_A DQS#2
- DDR\_A DQS2
- DDR\_A D18
- DDR\_A D19
- DDR\_A D24
- DDR\_A D25
- DDR\_A DM3
- DDR\_A D26
- DDR\_A D27
- DDR\_CKE0
- DDR\_A BS2
- DDR\_A BS0
- DDR\_A WE#
- DDR\_A CAS#
- DDR\_CS#1
- M\_ODT1
- DDR\_A D32
- DDR\_A D33
- DDR\_A DQS#4
- DDR\_A DQS4
- DDR\_A D34
- DDR\_A D35
- DDR\_A D40
- DDR\_A D41
- DDR\_A DM5
- DDR\_A D42
- DDR\_A D43
- DDR\_A D48
- DDR\_A D49
- DDR\_A DQS#6
- DDR\_A DQS6
- DDR\_A D50
- DDR\_A D51
- DDR\_A D56
- DDR\_A D57
- DDR\_A DM7
- DDR\_A D58
- DDR\_A D59
- CLK\_SMBDATA
- CLK\_SMBCLK

Follow Intel Layout checklist, add C141 05/12

DIMMA


Change to SP07F001720 04/30

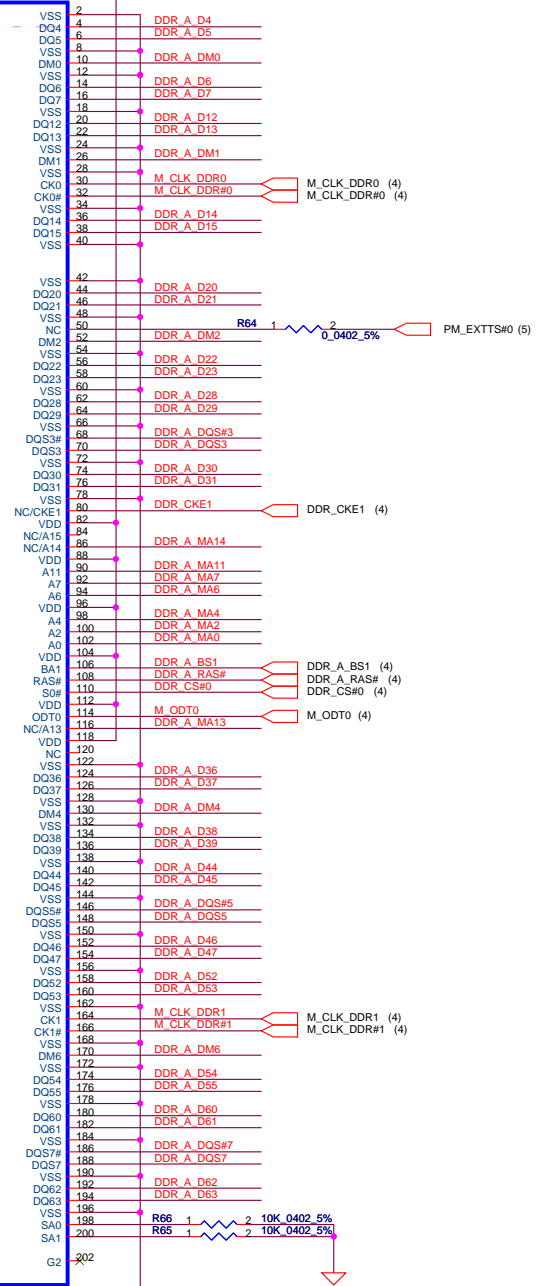

Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2006/08/18	Deciphered Date	2007/8/18	Title	
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPANY OR REPRODUCED OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				SCHEMATICS , MB A5651	
				Document Number	Rev
				401793	D
				Date: Friday, May 21, 2010	Sheet 7 of 32



4	
Change C174 C175 to 10U 0603 05/14	

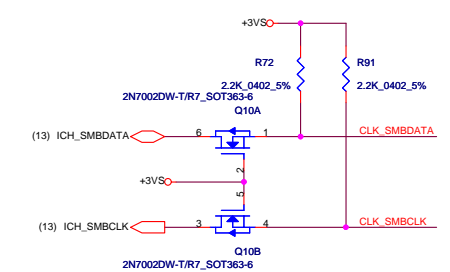

Change co-lay Low power clock GEN

+3VS

R1348 0.0603\_5% NORPW#

+1.5VS

R1349 0.0603\_5% LOWPW#

+1.5VM\_CK505

47P\_0402\_50VB

C1119

C140

C160



C169

10U\_0603\_6.3VB


0.1U\_0402\_16V4Z

0.1U\_0402\_16V4Z

0.1U\_0402\_16V4Z

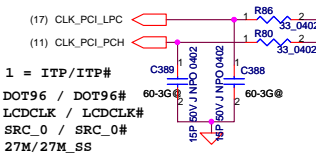

The image displays three identical circuit diagrams side-by-side, each representing a different signal line. Each diagram shows a 3V5 supply connected to a 10K pull-up resistor (R85, R95, or R71). The signal lines are labeled ITP\_EN, PC14\_SEL, and PC12\_TME. Each line also features a 10K pull-down resistor (R89, R90, or R77) connected to ground. The signal lines are marked with a ground symbol and a 10K pull-up resistor value.

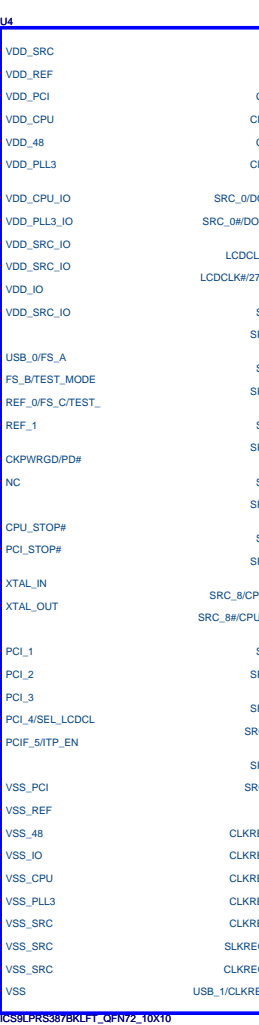

Add R107 05/04


WLAN\_CLKREQ# R121 2 1 10K 0402 5%

WWAN\_CLKREQ# R107 2 1 10K 0402 5%

PORT	DEVICE
REQ_3#	
REQ_4#	PCIE_WLAN
REQ_6#	
REQ_7#	
REQ_9#	
REQ_10#	
REQ_11#	PCIE_WWAN
REQ_A#	






## LCD POWER CIRCUIT

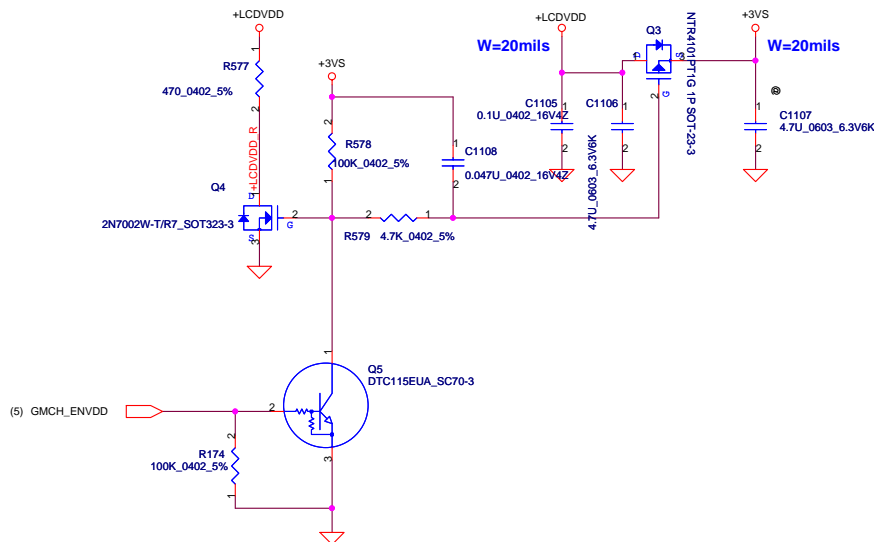


## CMOS & LCD/PANEL BD. Conn.


Modify JLVDS1 08/04

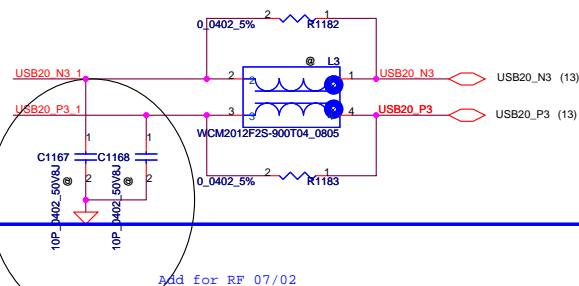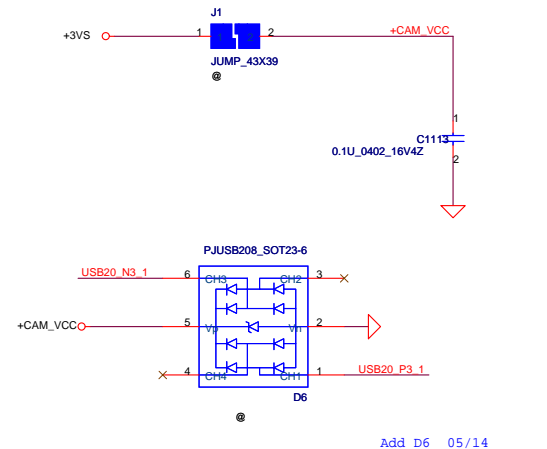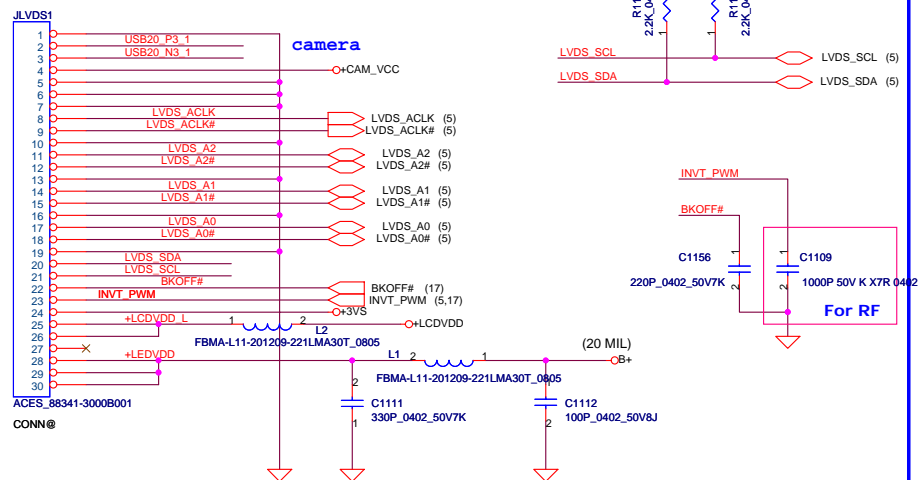


Security Classification	Compal Secret Data			Compal Electronics, Inc.		
Issued Date	2006/08/18	Deciphered Date	2007/8/18	Title	SCHEMATICS , MB A5651	
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number	401793	Rev B
				Date:	Friday, May 21, 2010	Sheet 9 of 32

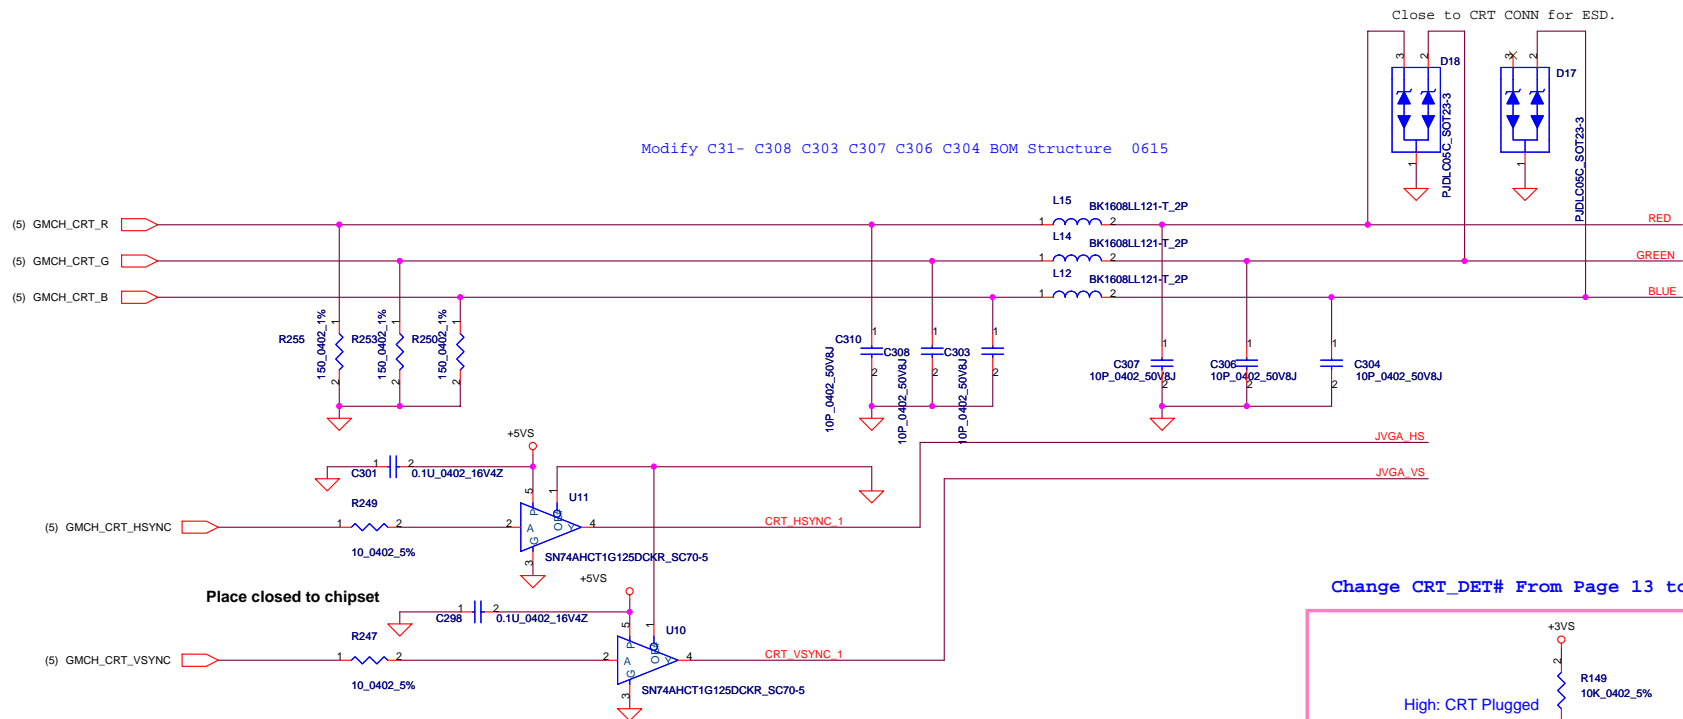



Add R1283 R1284  
Change R247 R249 to 10 ohm  
Add @ on U10 U11 C301 C298 06/08

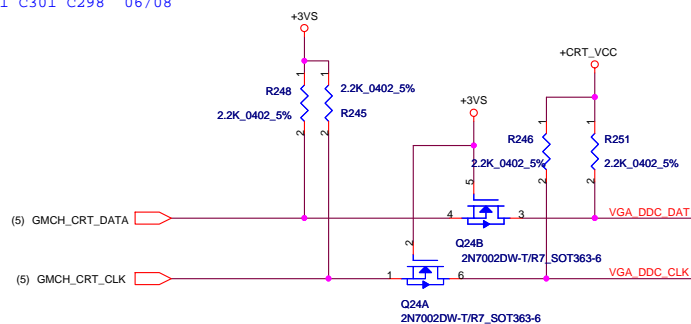

## CRT PORT


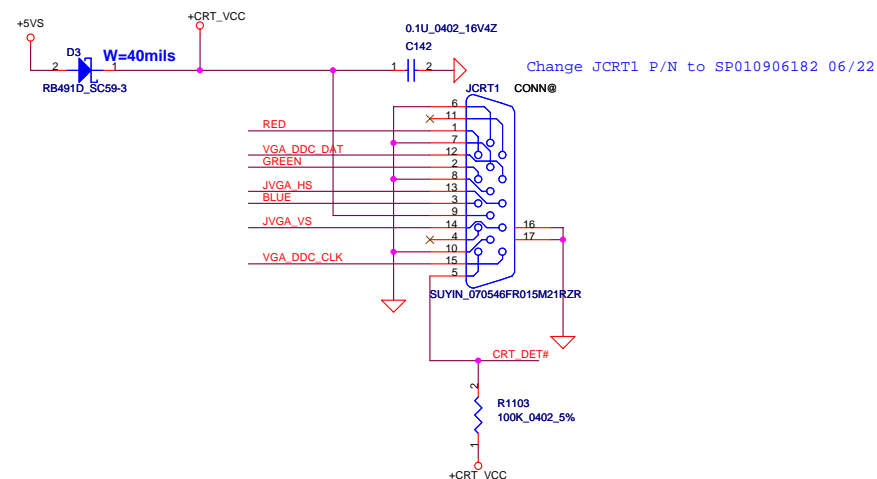


Security Classification		Compal Secret Data				Compal Electronics, Inc.							
Issued Date		2006/08/18		Deciphered Date		2007/8/18		Title		SCHEMATICS , MB A5651			
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.										Rev		D	
										Document Number		401793	
										Date		Friday, May 21, 2010	

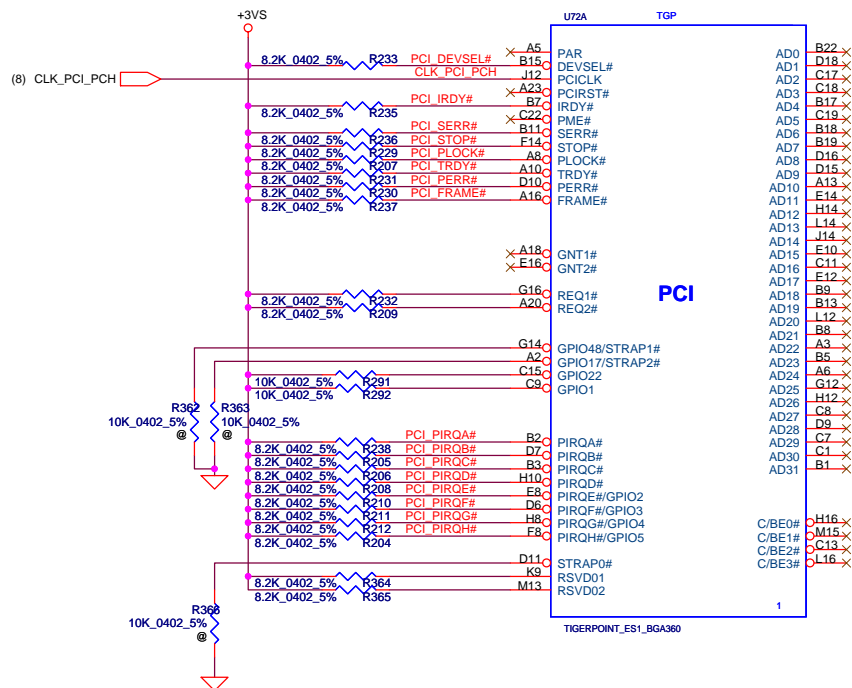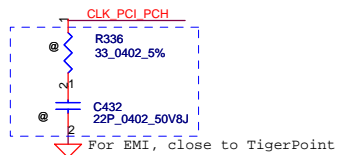

STRAP2# GPIO17	STRAP1# GPIO48	Boot BIOS
0	1	SPI
1	0	PCI
1	1	LPC

Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2006/08/18	Deciphered Date	2007/8/18	Title	SCHEMATICS , MB A5651
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number	401793
				Date	Friday, May 21, 2010
				Sheet	11 of 32
				Rev	D

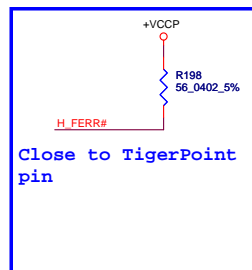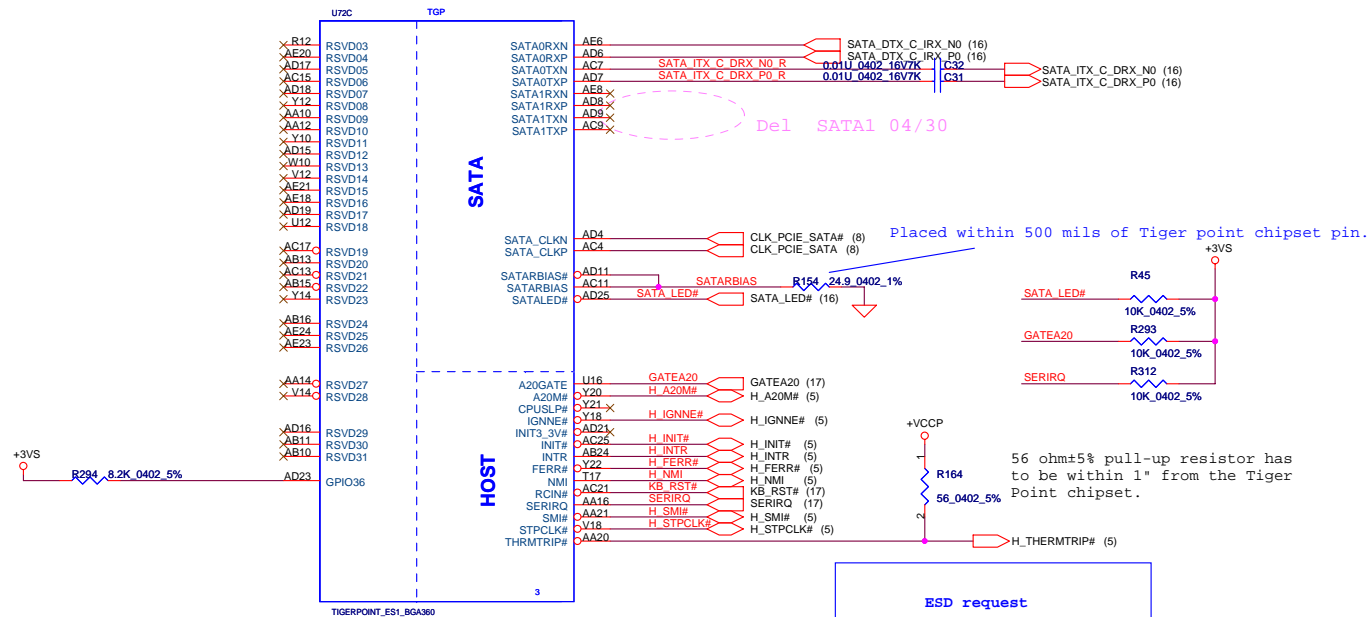

ESD request			
H_A20M#	C450	2	100P_0402_50V8J
H_IGNNE#	C451	2	100P_0402_50V8J
H_INIT#	C452	2	100P_0402_50V8J
H_INTR#	C453	2	100P_0402_50V8J
H_FERR#	C454	2	100P_0402_50V8J
H_NMI	C455	2	100P_0402_50V8J
H_SMI#	C456	2	100P_0402_50V8J
H_STPCLK#	C457	2	100P_0402_50V8J

Security Classification	Compal Secret Data			Compal Electronics, Inc.		
Issued Date	2006/08/18	Deciphered Date	2007/8/18	Title	SCHEMATICS , MB A5651	
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Rev	Document Number	Rev
					401793	D
				Date:	Friday, May 21, 2010	Sheet 12 of 32





# Mini-Express Card for WWAN

(17) EC\_TX\_P80\_DATA R402, 0402\_5%  
 (17) EC\_RX\_P80\_CLK EC\_RX\_P80\_CLK 1 2 EC\_TX\_P80\_DATA R  
 R403 0\_0402\_5%

Change JMINI1 to FOX\_AS0B246-S50U-7F\_52P-T 06/29

(13,20) ICH\_PCIE\_WAKE# ICH\_PCIE\_WAKE#

(8) WWAN\_CLKREQ# WWAN\_CLKREQ#

(8) CLK\_PCIE\_WWAN#

(8) CLK\_PCIE\_WWAN

(13) PCIE\_DTX\_C\_IRX\_N3

(13) PCIE\_DTX\_C\_IRX\_P3

Change to PCIE\_P3 05/13

(13) PCIE\_ITX\_C\_DRX\_N3

(13) PCIE\_ITX\_C\_DRX\_P3

+3VS\_WWAN

10U\_0805\_10V4Z

WLAN\_WAKEUP\_R#

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK

UIM\_VPP

UIM\_DATA

UIM\_RST

UIM\_PWR

UIM\_CLK




# ADD LED PCB CONN 06/12


## LED PCB CONN

Change JP18 to NEW P/N 06/23

09/03 Change +5VALW , +5VS to +3VALW +3VS

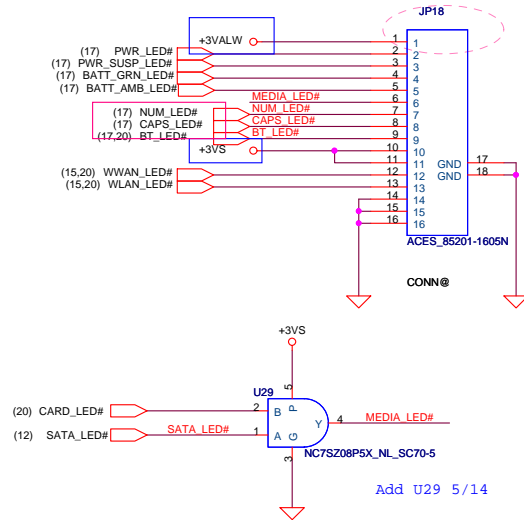



## SATA HDD Conn.

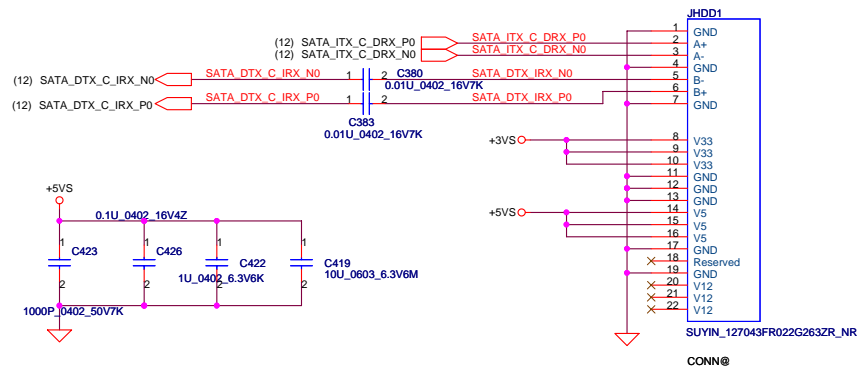


Security Classification	Compal Secret Data			Compal Electronics, Inc.	
Issued Date	2006/08/18	Deciphered Date	2007/8/18	Title	SCHEMATICS , MB A5651
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number	401793
				Date:	Friday, May 21, 2010
				Sheet	16 of 32
				Rev	D



Add For NAV50 07/06  
09/03 Change +5VS to +3VS

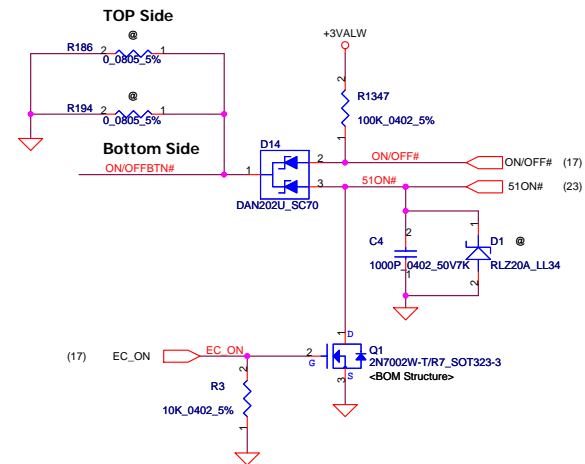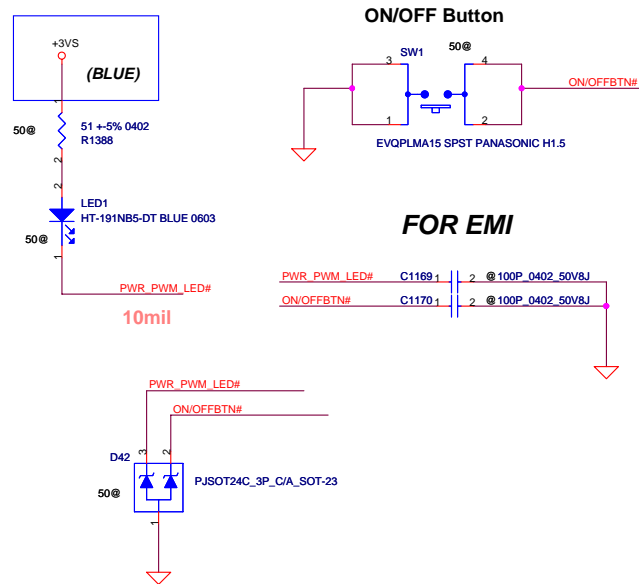


### PWR/B Conn


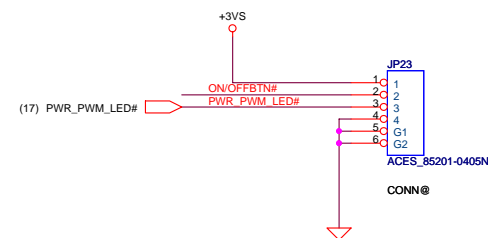


Update PW/B Conn 0623

### LID Switch

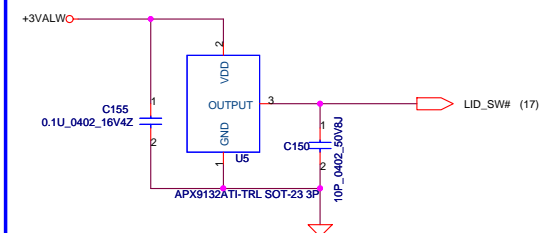


Security Classification	Compal Secret Data			Compal Electronics, Inc.	
Issued Date	2006/08/18	Deciphered Date	2007/8/18	Title	SCHEMATICS , MB A5651
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.					Rev D
Document Number				401793	
Date:				Friday, May 21, 2010	Sheet 18 of 32

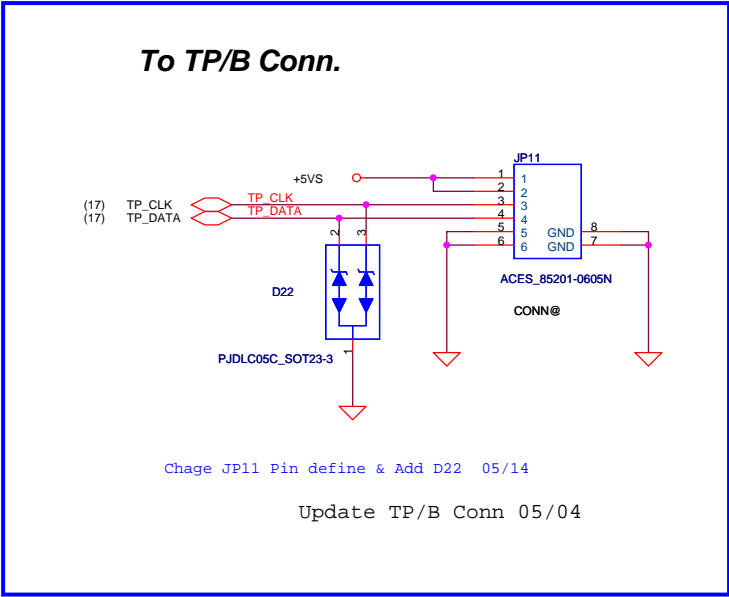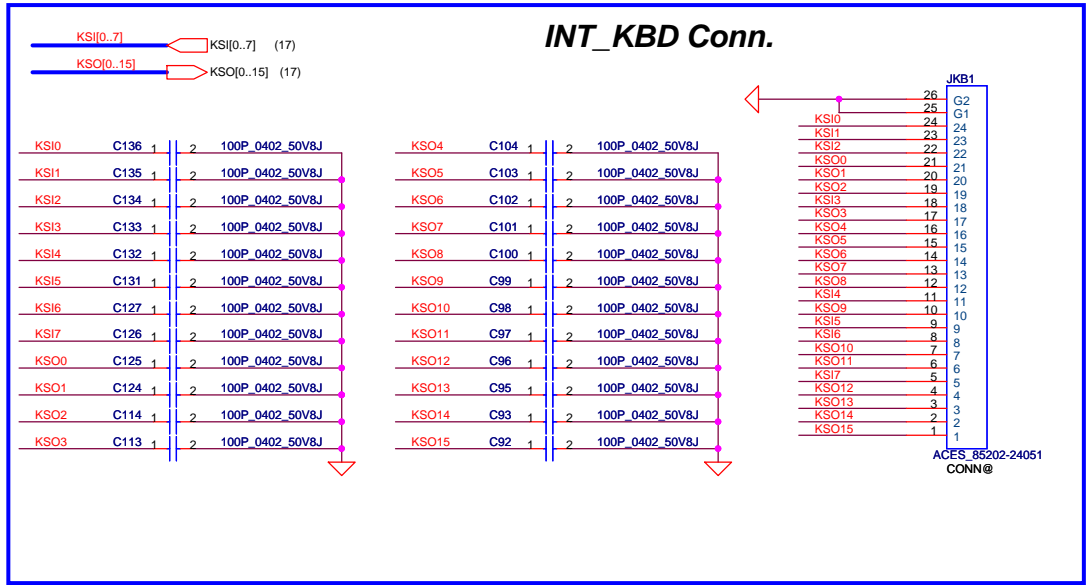


Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2006/08/18	Deciphered Date	2007/8/18	Title	SCHEMATICS , MB A5651
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number	401793
				Date	Friday, May 21, 2010
				Sheet	19 of 32




## I/O Board Conn.

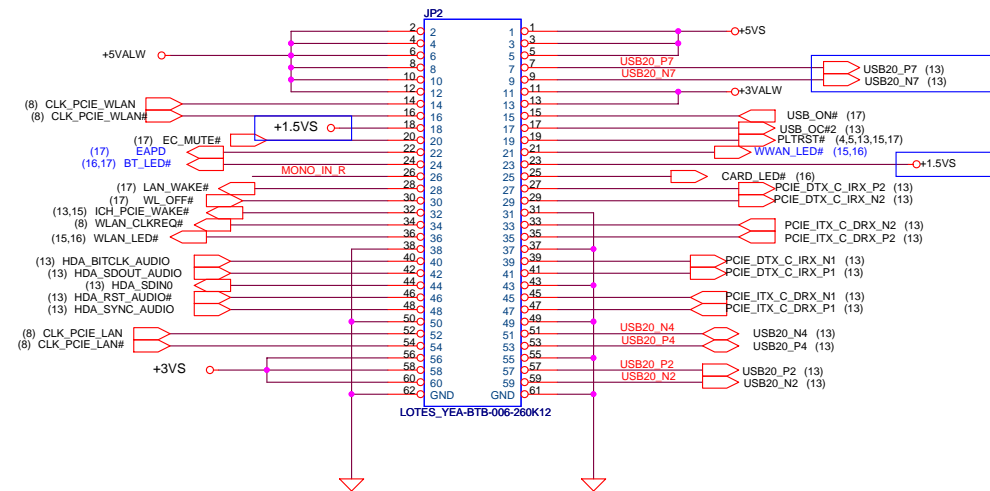



## USB CONN.2

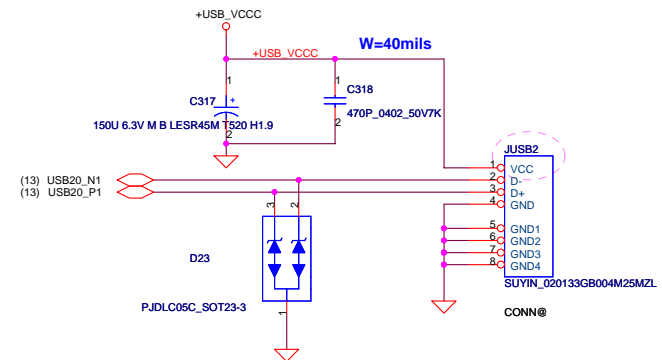

Modify Hole location by (ME Drawing 06/12) 0615

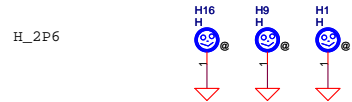

09/03 Del H12

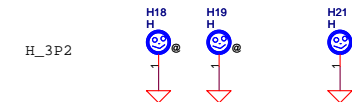


FIDUCIAL\_C40M80


Security Classification	Compal Secret Data			Compal Electronics, Inc.		
Issued Date	2006/08/18	Deciphered Date	2007/8/18	Title		
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF ROADS AND TRANSPORTATION DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				SCHEMATICS , MB A5651		
				Document Number	401793	Rev D
				Date:	Friday, May 21, 2010	Sheet 21 of 32

Change R51 R57 R70 R63 R317 R114 R190 to 0402 SIZE 04/30  
 Change C221 C218 C223 C 191 C201 C170 C392 C393 C394 to 0603 SIZE 04/30






### +5VALW TO +5VS

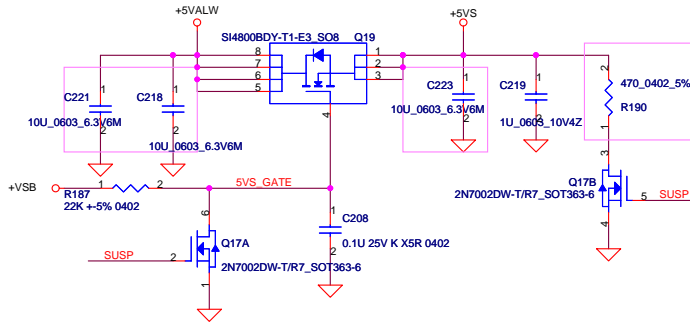

### +3VALW TO +3VS


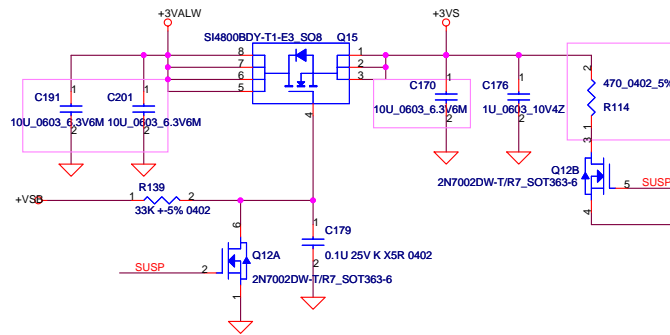


### +1.8V to +1.8VS

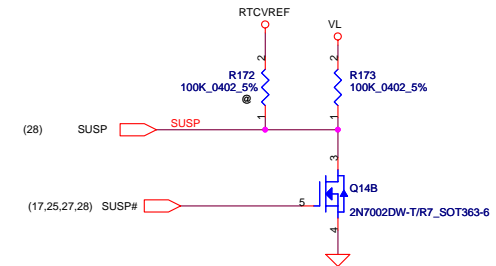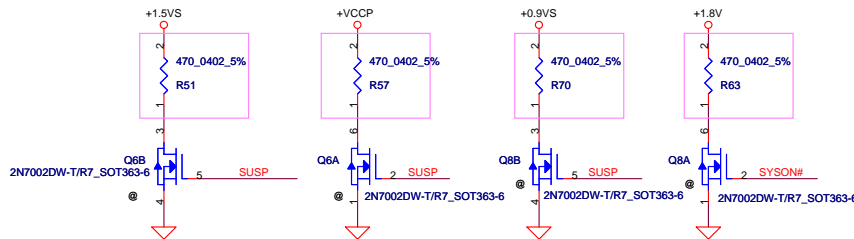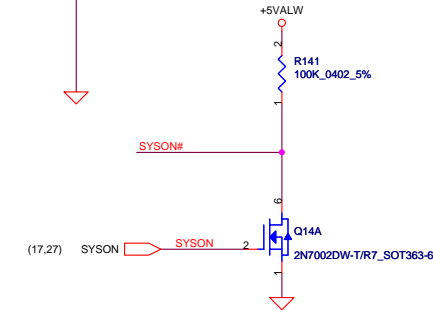
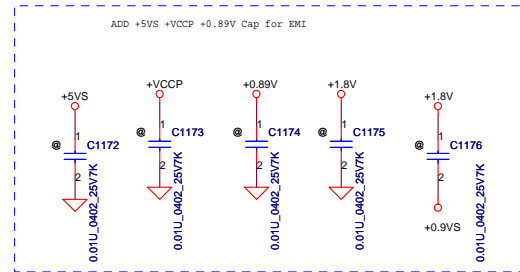
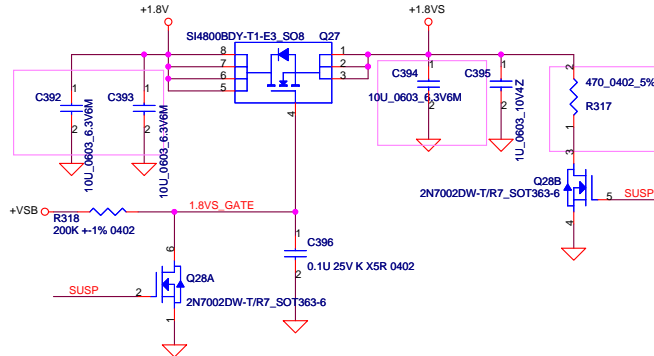


Security Classification		Compal Secret Data				Compal Electronics, Inc.			
Issued Date		2006/08/18		Deciphered Date		2007/8/18		Title	
								SCHEMATICS , MB A5651	
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.						Rev		Rev	
						Document Number		401793	
						Date		Friday, May 21, 2010	
						Sheet		22 of 32	
						Rev		D	





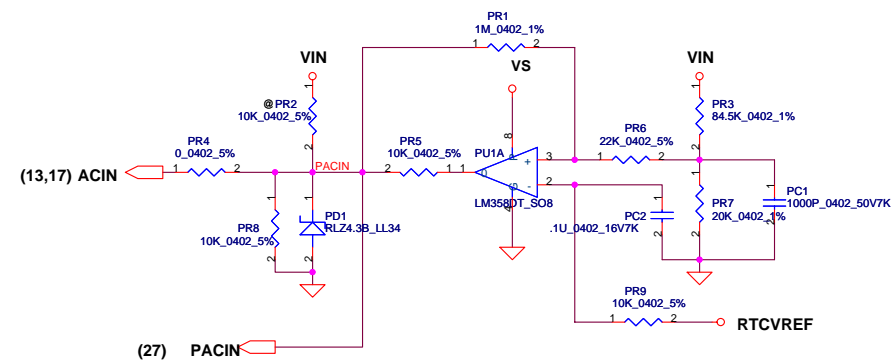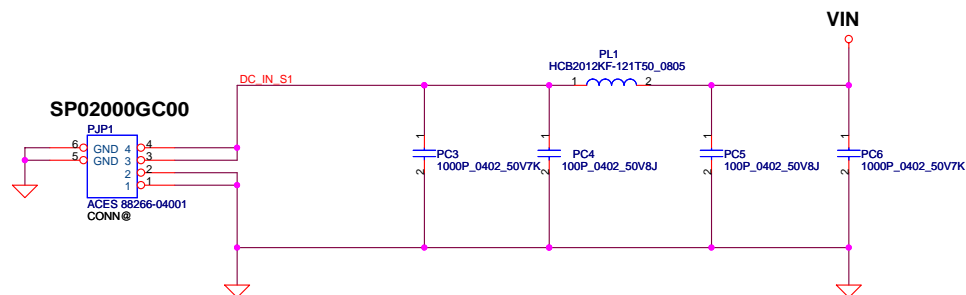



Vin Detector			
	Min.	Typ	Max.
H-->L	16.976V	17.525V	17.728V
L-->H	17.430V	17.901V	18.384V

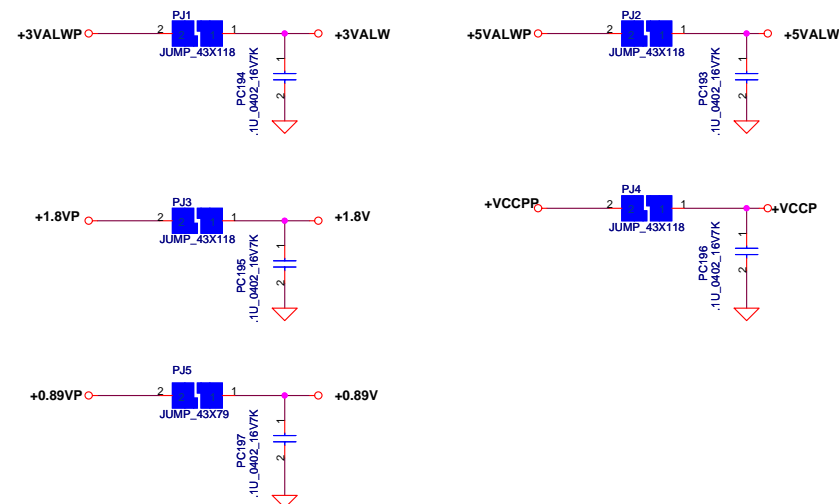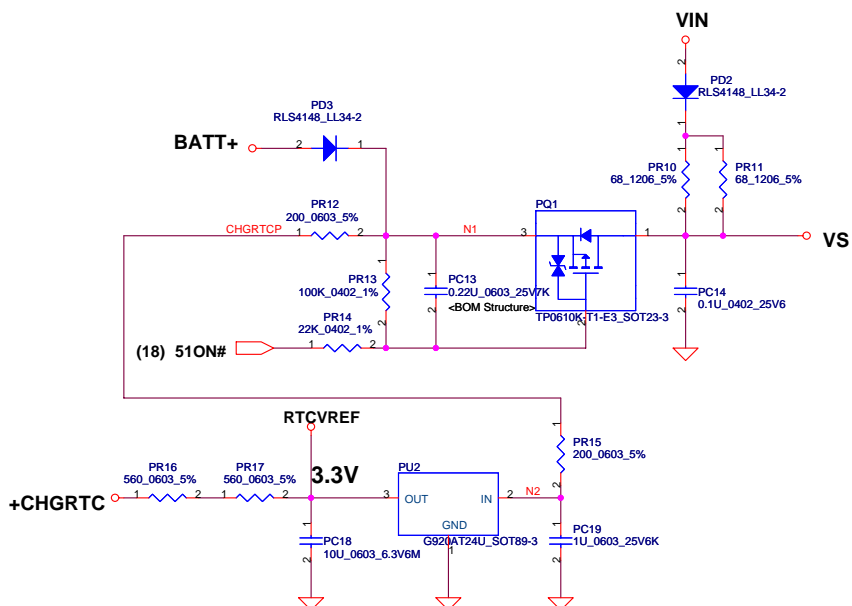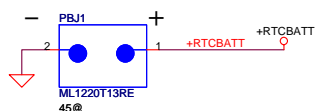

Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2007/09/20	Deciphered Date	2008/09/20	Title	SCHEMATICS , MB A5651
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number	401793
				Rev	D
				Date:	Friday, May 21, 2010
				Sheet	23 of 32

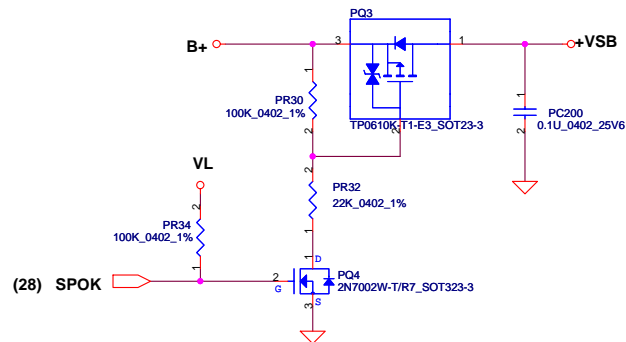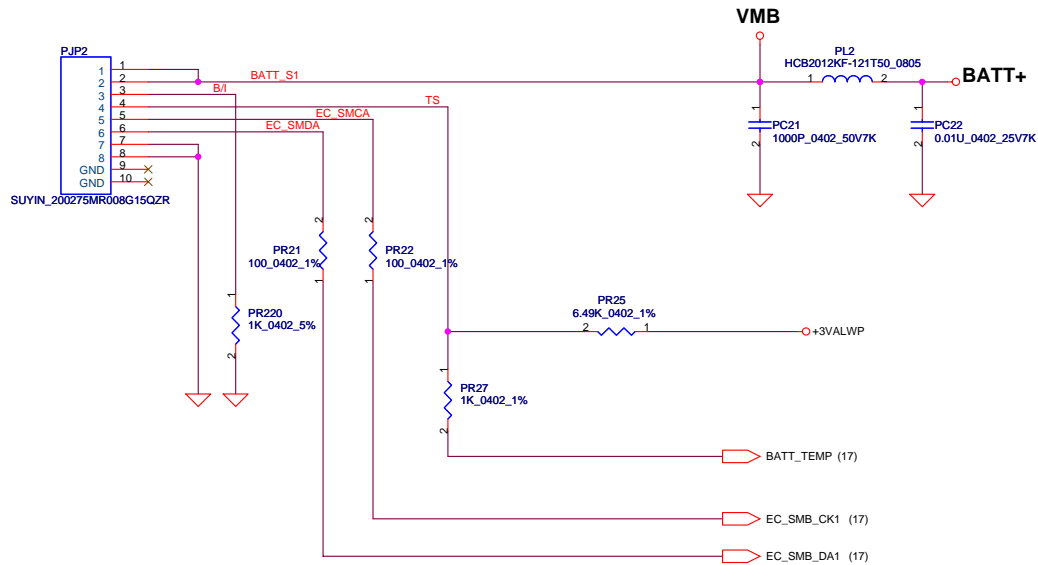


PH1 under CPU bottom side :  
CPU thermal protection at 90 degree C  
Recovery at 70 degree C

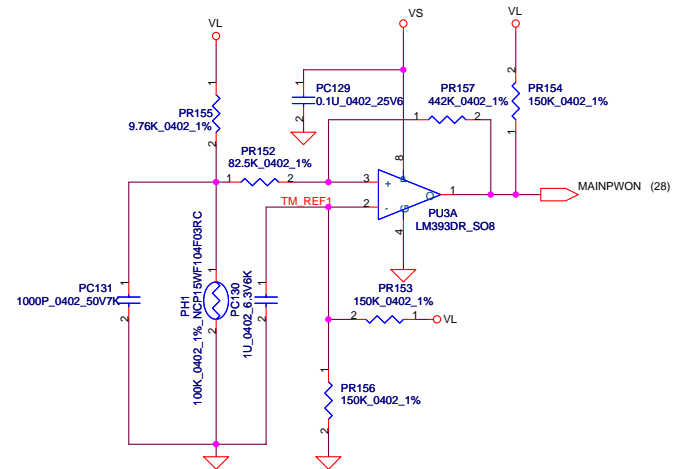


Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2007/09/20	Deciphered Date	2008/09/20	Title	SCHEMATICS , MB A5651
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number	401793
				Date	Friday, May 21, 2010
				Sheet	24 of 32
				Rev	D




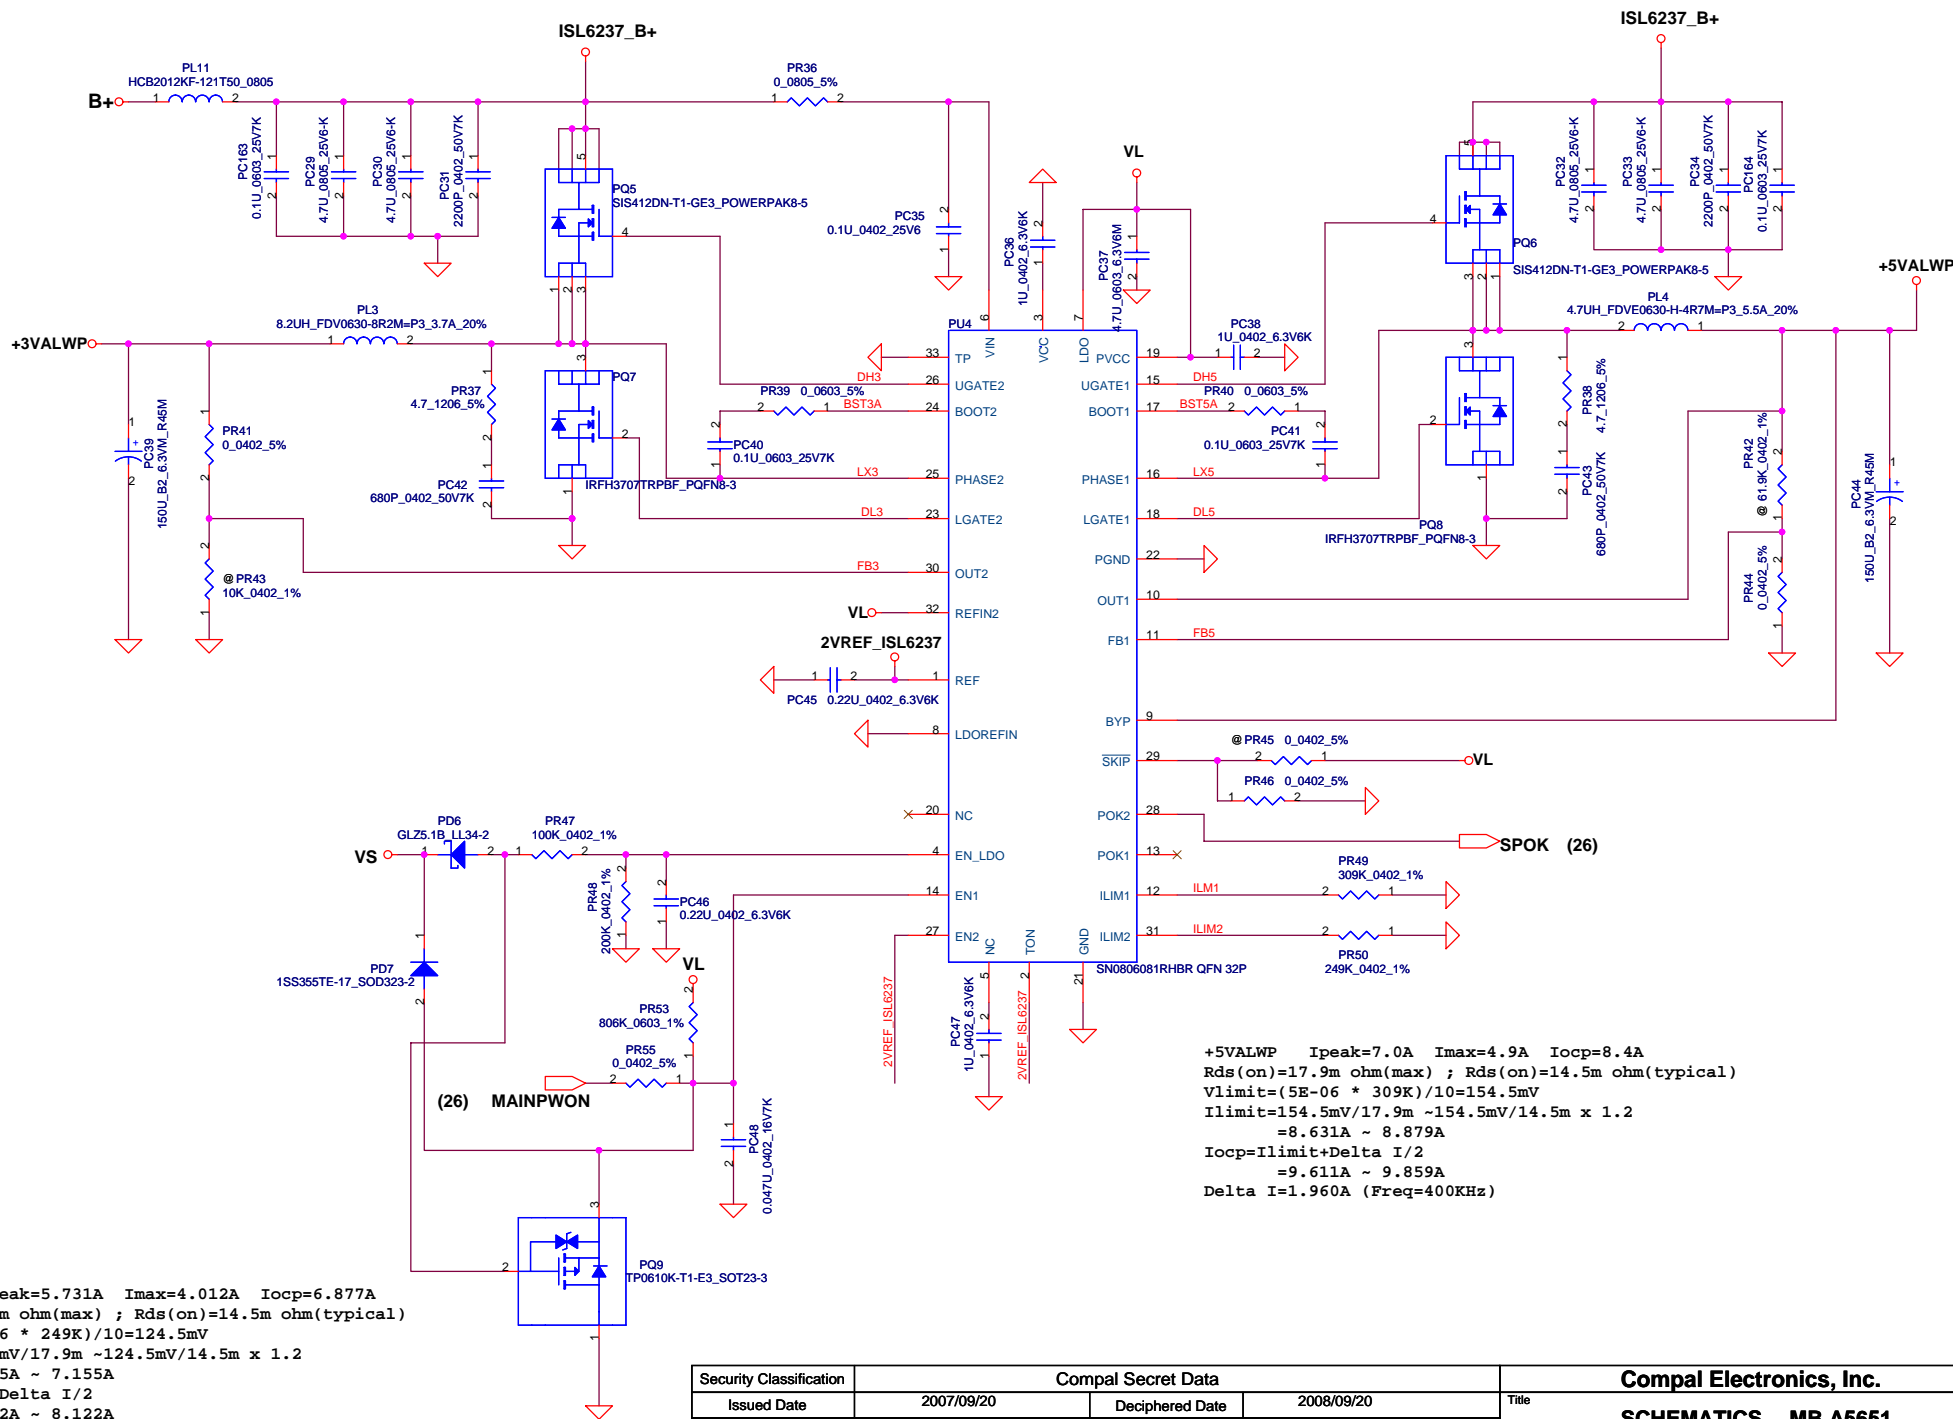

Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2007/09/20	Deciphered Date	2008/09/20	Title	SCHMATICS , MB A5651
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number	401793
				Date	Friday, May 21, 2010
				Sheet	26 of 32
				Rev	D

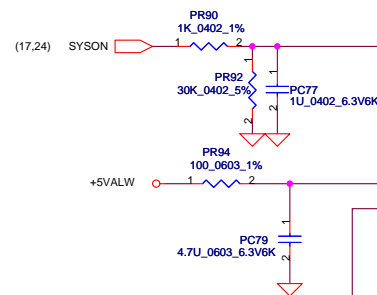

<Vo=1.8V> VFB=0.75V  
 $V_o = V_{FB} * (1 + PR96 / PR97) = 0.75 * (1 + 28.7K / 20.5K) = 1.8V$   
 $F_{sw} = 328KHz$   
 $C_{out} ESR = 15m\ ohm$   $R_{dson(max)} = 17.9m$   $R_{dson(typical)} = 14.5m$   
 $I_{peak} = 4.97A$ ,  $I_{max} = 3.479A$ ,  $I_{ocp} = 5.964A$   
 $\Delta I = ((19 - 1.8) * (1.8 / 19)) / (2.2u * 328K) = 2.259A$   
 $\Rightarrow 1/2 \Delta I = 1.129A$   
 $V_{trip} = R_{trip} * I_{0uA} = 8.66K * 10uA = 0.0866V$   
 $I_{ocpmin} = V_{trip} / (R_{dsonmax}) + 1.129$   
 $= 0.0866 / (0.0179) + 1.129 = 5.967A$   
 $I_{ocpmax} = (0.0866 / (0.0145 * 1.2)) + 1.129A = 6.106A$   
 $I_{ocp} = 5.967A \sim 6.106A$

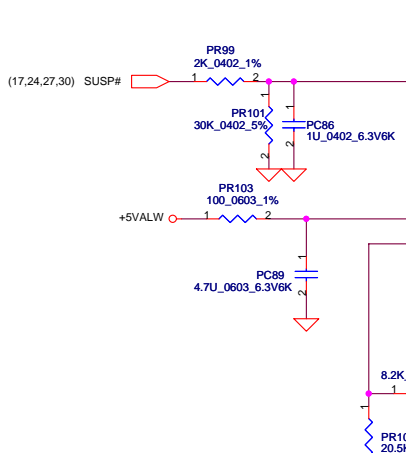

<Vo=1.05V> VFB=0.75V  
 $V_o = V_{FB} * (1 + PR105 / PR106) = 0.75 * (1 + 8.2K / 20.5K) = 1.05V$   
 $F_{sw} = 280KHz$   
 $C_{out} ESR = 15m\ ohm$   $R_{dson(max)} = 17.9m$   $R_{dson(typical)} = 14.5m$   
 $I_{peak} = 3.124A$ ,  $I_{max} = 2.187A$ ,  $I_{ocp} = 3.749A$   
 $\Delta I = ((19 - 1.05) * (1.05 / 19)) / (1.5u * 280K) = 3.549A$   
 $\Rightarrow 1/2 \Delta I = 1.774A$   
 $V_{trip} = R_{trip} * I_{0uA} = 14K * 10uA = 0.14V$   
 $I_{ocpmin} = V_{trip} / (R_{dsonmax}) + 1.774$   
 $= 0.14 / (0.0179) + 1.774 = 9.596A$   
 $I_{ocpmax} = (0.14 / (0.0145 * 1.2)) + 1.774A = 9.820A$   
 $I_{ocp} = 9.596A \sim 9.820A$

Security Classification	Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2007/09/20	Deciphered Date	2008/09/20	Title
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number
				401793
				Rev
				D
				Date: Friday, May 21, 2010
				Sheet 27 of 32







Item	Fixed Issue	Reason for change	Rev.	PG#	Modify List	Date	Phase
1	add PC200	For design change	0.1	24		2009.5.15	EVT
2	add PC193,PC194	For design change	0.1	26		2009.5.15	EVT
3	add PC195,PC196	For design change	0.1	27		2009.5.15	EVT
4	add PC197,PC198,PC199	For design change	0.1	28		2009.5.15	EVT
5	change PL3,PL4	For design change	0.1	26	change PL3,PL4 to 4.7uH	2009.5.15	EVT
6	change PQ10,PQ11	For design change	0.1	25	change PQ10,PQ11 to P-Chanel	2009.6.5	EVT
7	add PC165	Solution for 3G noise reduce	0.1	25		2009.6.5	EVT
8	add PC163,PC164	Solution for 3G noise reduce	0.1	26		2009.6.5	EVT
9	add PC166,PC167	Solution for 3G noise reduce	0.1	27		2009.6.5	EVT
10	add PC168	Solution for 3G noise reduce	0.1	28		2009.6.5	EVT
11	delete PC103,PC1120	For design change	0.1	29		2009.6.5	
12	change PR94,PR102	For design change	0.1	27	change PR94,PR102 to 100ohm	2009.6.5	
13	change PC79,PC89	For design change	0.1	27	change PC79,PC89 to 4.7uF	2009.6.5	
14	change PR112	For design change	0.1	28	change PR112 to 100ohm	2009.6.5	
15	change PC99	For design change	0.1	28	change PC99 to 4.7uF	2009.6.5	
16	change +5VALW/+3VALW OCP	For design change	0.1	26	change PR49 to 309ohm & PR50 to 249ohm	2009.6.5	
17	add PJ1,PJ2,PJ3,PJ4,PJ5,PJ6,PJ7	For design change	0.1	25		2009.6.15	
18	add PJ9,PJ10	For design change	0.1	28		2009.6.15	
19	Change net name	For design change	0.1	25	Change net name +1.05V to +VCCP	2009.6.15	
20	Change PJP2	For design change	0.1	24	Change PJP2 to DC040903020	2009.6.15	
21	Change PBJ1	For design change	0.1	23	Change PBJ1 to SP020008Y00	2009.6.15	
22	delete PJ6,PJ7,PJ9,PJ10	For design change	0.1	28		2009.6.18	
23	Change net name	For design change	0.1	29	Change net name GND_SIGNAL to GND	2009.6.18	

Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2007/09/20	Deciphered Date	2008/09/20	Title	
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF RESEARCH AND DEVELOPMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number	Rev
				401793	D
Date: Friday, May 21, 2010				Sheet	30 of 32

Item	Fixed Issue	Reason for change	Rev.	PG#	Modify List	Date	Phase
1	Change PR194	For design change	0.1	29	change PR194 to 4.7K ohm	2009.6.30	EVT
2	add PR221	For design change	0.1	25		2009.6.30	EVT
3	Change PR4	For design change	0.1	23	change PR4 to 0 ohm	2009.7.2	EVT
4	Change PJP3 to PBJ1	For design change	0.1	23	change SP020008Y00 to SP093MX000	2009.8.4	EVT
5	Change PH1 & PH4	For design change	0.1	24	change SL210031F00 to SL200000V00	2009.8.12	EVT
6	Change PL10	For design change	0.1	29	change SH000006I80 to SH000000700	2009.8.12	EVT
7	Change PR99 & PR108	Modify power sequence	0.1	27	change SD028000080(0 ohm) to SD034200280(20K ohm)	2009.8.12	EVT
8	Change PR90	Modify power sequence	0.1	27	change SD028000080(0 ohm) to SD034100280(10K ohm)	2009.8.12	EVT
9	Change PR83	Modify ISL6251 Charger KV	0.1	25	change SD034182280(18.2 ohm) to SD034154280(15.4K ohm)	2009.8.24	EVT
10	Change PR117	Modify power sequence	0.1	28	change SD028000080(0 ohm) to SD034100280(10K ohm)	2009.8.24	EVT
11	Change PR99 & PR108	Modify power sequence	0.1	27	change SD034200280(20K ohm) to SD034200180(2K ohm)	2009.8.24	EVT
12	Change PR90	Modify power sequence	0.1	27	change SD034100280(10K ohm) to SD034100180 (1K ohm)	2009.8.24	EVT
13	Change PC77 & PC86 & PC96	Modify power sequence	0.1	27	Change PC77 & PC86 & PC96 to pop change SE076104KM8(0.1uf) to SE000000K80 (1uf)	2009.8.24	EVT
14	Change PC109	Change part number	0.1	27	change SE076104KM8(0.1uf) to SE076104K80(0.1uf)	2009.8.24	EVT
15	Change PL3.PL4	To slove high frequency noise	0.1	26	change SH00000BU00(4.7uH) to SH00000BS00(8.2uH)	2009.8.27	EVT
16	Change PL9	For design change	0.1	29	change SM01000BY00 to SM01000C000	2009.9.4	DVT
17	Change PL4	To improve +5VALWP efficiency	0.1	26	change SH00000BS00(8.2uH) to SH00000F900(4.7uH)	2009.9.10	DVT
18	Change PR209	Modify CPU CORE OCP	0.1	29	change SD028180180(1.8K ohm) to SD034237180 (2.37K ohm)	2009.9.30	PVT
19							
20							
21							
22							
23							

Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2007/09/20	Deciphered Date	2008/09/20	Title	SCHEMATICS , MB A5651
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF THE CUSTOMER DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number	401793
Date:	Friday, May 21, 2010	Sheet	31	of	32

<div>&lt;2009/4/28&gt; Update new power schematic, release first version NAV50 schematic  &lt;2009/04/29&gt; . Add R1182 R1183 L3 on page 9 . Change J3 to R1184 on page 13  &lt;2009/04/30&gt; . Change JDIM1 to SP07F001720 on page 7 . Del SATA1 Port on page 12 . Change R51 R57 R70 R63 R317 R314 R190 to 0402 Size on page 21  &lt;2009/05/04&gt; . Add WWAN_CLKREQ# and R107 pull-high to +3VS on page 8 . Add CRT_DET# on page 10 . Add CRT_DET# circuit on page 13 . Add 3 LEDS on page 16 . Add BT/BTN Board CONN. on page 16 . Update TP/B CONN. to SP01000LB00 on page 19  &lt;2009/05/11&gt; . Add INVT_PWM on Page 5 . Del R323 on page 5 . C74 change to 2.2U_0603 on page 6 . C267 change to 22U on page 6 . C391 change to 0.1U on page 6 . Del C67 C35 C33 C36 on page 6 . Del +LGI_VID and U71.A21 direct connect to +VCCP on page 6 . Follow Intel checklist, add R52 on FSB on page 8 . Add D5 D7 D8 on page 4 . Add R174 on page 9 . Add PCI_RST# on page 11 . Add C1115 C1114 C1116 C1117 C1118 on page 15  &lt;2009/05/12&gt; . Follow Intel Layout Checklist, Add C141 on VDDSPD on page 7 . Modify SRC CLK PORT LIST on page 8 . Del CLKREQ_LAN# on page 8 . Change PCIE Port list on page 13 . Change USB Port list on page 13 . Add W/L 3G SW on page 16 . Del R103 on page 18  &lt;2009/05/13&gt; . Change JMINI1 to PCIE Port 3 on page 15  &lt;2009/05/14&gt; . Page8 Change C174 C175 to 10U_0603  &lt;2009/05/14&gt; . Update New Power schematic . Del R376 R377 on page 8 . Del D5 D7 D8 on page 4 . Change JLVDS1 to SP010006810 on page 9 . Add D6 for EMI on page 9 . Change C1106 to C_0603 type on page 9 . Change USB_OC# on page 13 . Add USB Port2 on page 20 . Change JP11 Pin define &amp; Add D22 on page 19 . Change C512 to 1u_0402 on page 15 . Add U29 (MEDIA_LED#) on page 16  &lt;2009/05/19&gt; .Update new clock GEN co-lay schematic on page 8  &lt;2009/06/05&gt; .Update new clock GEN co-lay schematic on page 8 .Follow Intel check list change C161 C165 to 27P on page 8 .Follow Intel check list change C56 to 22uF on page 6  &lt;2009/06/08&gt; .Update New Power schematic 06/06 version Page 13- a.Del R203 (pull-up GPIO6 Resister) b.Change R1184 NU Page 17- a. Add VGATE b. Del R1294 c. Change D30 NU d. Change R1295 to 0 ohm e. Add R1309 0 ohm on EC_RSMRST# f. Pull-up LAN_WAKE# +3VALW g. ICH_POK change to PCH_POK h. Pull-up KB_RST# to +3VS Page 10- a. Add R1283 R1284 ,Change R247 R249 to 10 ohm b. Add @ on U10 U11 C301 C298 c. Del C302 C300 R1281 R1287</div>	<div>&lt;2009/06/10&gt; . Page 7- Add C116 @ . Page 22- Modify USB_OC#1_2 to USB_OC#2 . Page 17- Modify PLTRST# to PCI_RST# . Page 17- Add @ on R1311  &lt;2009/06/12&gt; . Page4 Add C314 C313 C1150 D19 on +VCC_FAN1 . Page8 Add C1145 C1146 C1147 . Page10 Move CRT_DET# from Page13 to Page10 . Page13 Add +RTCVCC circuit  &lt;2009/06/15&gt; . Update New Power schematic (change PBJ1 to PJP3) . Page 10 modify C310 C308 C303 C307 C306 C304 Bom Structure . Page 22 Modify Hole location by (ME drawing 06/12)  &lt;2009/06/16&gt; . Page7 Modify DDR Command Control Pin pull-high Resister location . Page9 Change R577 to 0402 type  &lt;2009/06/17&gt; . Update New Power schematic 06/17 . Page9 modify LVDS Conn. Pin define . Page9 Del C1110 . Page4 Add EMI solution D38 D39 D40  &lt;2009/06/18&gt; . Update New Power schematic 06/18 . Page8 modify U4 Pin define and Q31 . Page13 Add R1376, R1377 . Page15 Modify C403 . Page23 Modify H11  &lt;2009/06/19&gt; . Page4 Add new signal CPU_ITP , CPU_ITP# . Page5 ADD R1378 . Page6 ADD C1152,C1153,C1154 C1160,C1161,C1162 . Page7 DDR_A_D8與DDR_A_D9互換 . Page8 ADD R1379,R1380,U77,R1381,C1157,R1382,R1383,R1384,C1157 , Page8 DEL C390 . Page9 ADD C1156 . Page11 DEL R1322, R1154 . Page13 DEL U77, ADD C1158 . Page17 ADD C1159  &lt;2009/06/22&gt; . Page22 change IO Conn. pin34 from 48M to USB_ON# . Page10 change JCRT1 P/N to SP010906182  &lt;2009/06/23&gt; . Page15 Add C1163 C1164 C1165 C1166 . Page18 change PWR/B Conn. P/N to SP01000H300 . Page22 change JUSB1 JUSB2 P/N  &lt;2009/06/24&gt; . Page8 Change C1350 C1351 to 0402 type . Page10 Add R1385 R1386 on JVGA_HS JVGA_VS  &lt;2009/06/25&gt; . Page22 move some parts to I/O Board , Add the MONO_IN_R on M/B .  &lt;2009/06/29&gt; . Page16 Change JP24 to ACES_88266_05001 . Page15 Change JMINI1 to FOX_AS0B246-S50U-7F_52P-T  &lt;2009/06/30&gt; . Page18 Change PWR_LED# to PWR_PWM_LED# . Page17 Add PWR LED DETECT PIN on Pin97  &lt;2009/07/02&gt; . Update New Power schematic 07/02 . Page9 Add C1167 C1168 for RF request. . Page13 Change R223 to 100K . Page16 change JP24 to ACES_85201-0505N . Page17 Del R1387 R1388 on EC Pin97 . Page17 Add New Board ID to separate NAV50 NAV60 . Page17 Change 展頻IC to SA00003J400 (New) . Page18 Add D41 for ESD</div>	<div>&lt;2009/07/03&gt; . Page18 Add D41.2 to PWR_PWM_LED# . Page8 Change co-lay net name to +1.5VM_CK505 . Page20 Change JP2 Pin42 to +5VS  &lt;2009/07/06&gt; . Page18 Add pwr switch for NAV50  &lt;2009/07/08&gt; . Page5 Add 470pf on H_SMI# for known issue.  &lt;DVT START&gt;  &lt;2009/08/04&gt; . Page5 CLK_CPU_HPLCLK CLK_CPU_HPLCLK# exchange . Page9 Change JLVDS1 to P/N ACES 88341-3001 30P . Page17 del PM_1.8V(U6.82) ,Del R1310 R1311 . Page18 Del D41  &lt;2009/09/03&gt; . Page7 Change C112 to 0402 type . Page8 Add T6 on CLK_48M_CR . Page16 Modify JP18 Pin define change +5VALW +5VS to +3VALW +3VS . Page20 Change Pin 18, 23 to +1.5VS change Pin7 , 9 to USB20_P7 N7 . Page21 Del H12  &lt;2009/09/08&gt; Update Power schematic 0904 . Page18 Change R1388 to 100 ohm 0402 . Page18 Change LED1 to SC591NB5A00  &lt;2009/09/10&gt; Update Power schematic 0910 . Page22 unmount Q6 Q8  &lt;2009/10/07&gt; . Page4 U71 Change to SA00003M800 . Page6 R26 Change to SHI00009C00 . Page13 R152 Change to SD034200A80 . Page18 R1388 Change to SD028510A80  &lt;2010/04/29&gt; update new bom</div>
---	--	--